

A520 BCI Smooth Flame Burner

This type of smooth flame burner has been designed for low capacity applications. It incorporates a single slot design with a bottom Centre feed feature.

The burner can be made to any length between 100 and 500 mm, making it ideal for the treatment of Polypropylene containers, also there is the additional option of a deckle rod so the flame can be adjusted to suit a variety of different products.




Features

- Robust Aluminium Extrusion Construction
- Consistent flame pattern
- Can be used with all gases

Applications

- Flame Treating of Plastics
- Flame drying of inks
- Flame sealing, polishing, hardening, annealing

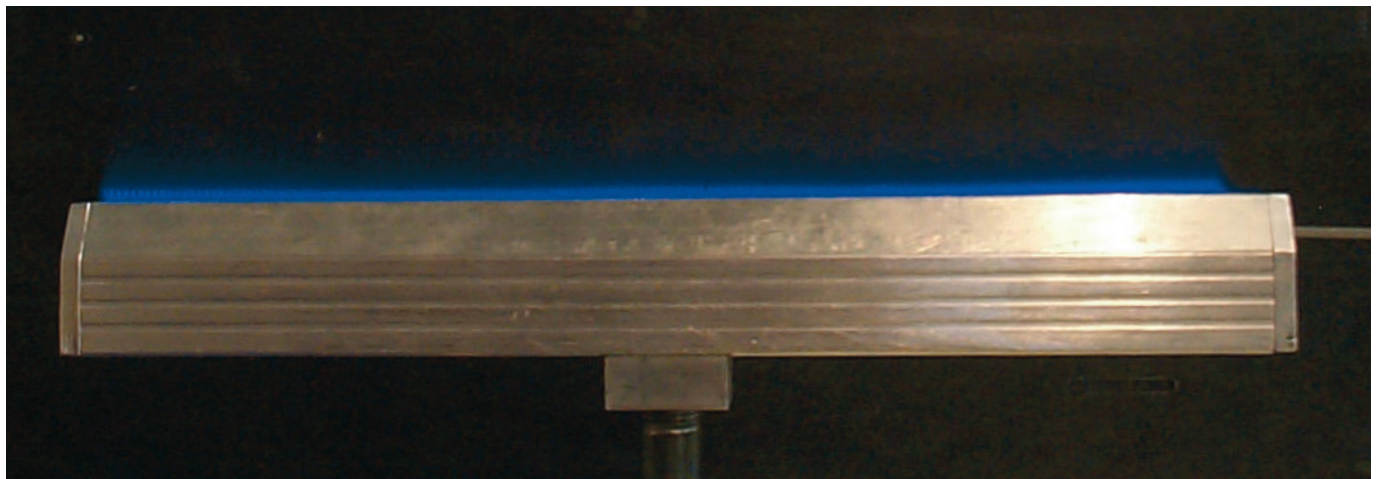

Burner Model No.	Minimum Length	Maximum Length	Rating Per Inch - Btu's"/hr
A520 BCI + D	100mm / 4"	508mm / 20"	5,000